

WARNING:

ILS NOT CONFORM TO
ANNEX 10 STANDARDS

APP *Brindisi Approach* 121.000 118.400
TWR *Brindisi Tower* 118.100


AD ELEV
46

L
B
R

BRINDISI
ILS - Y RWY 31

DOC.8168-ED.4-1993 - AMDT.11

CHANGE: MAGNETIC VARIATION

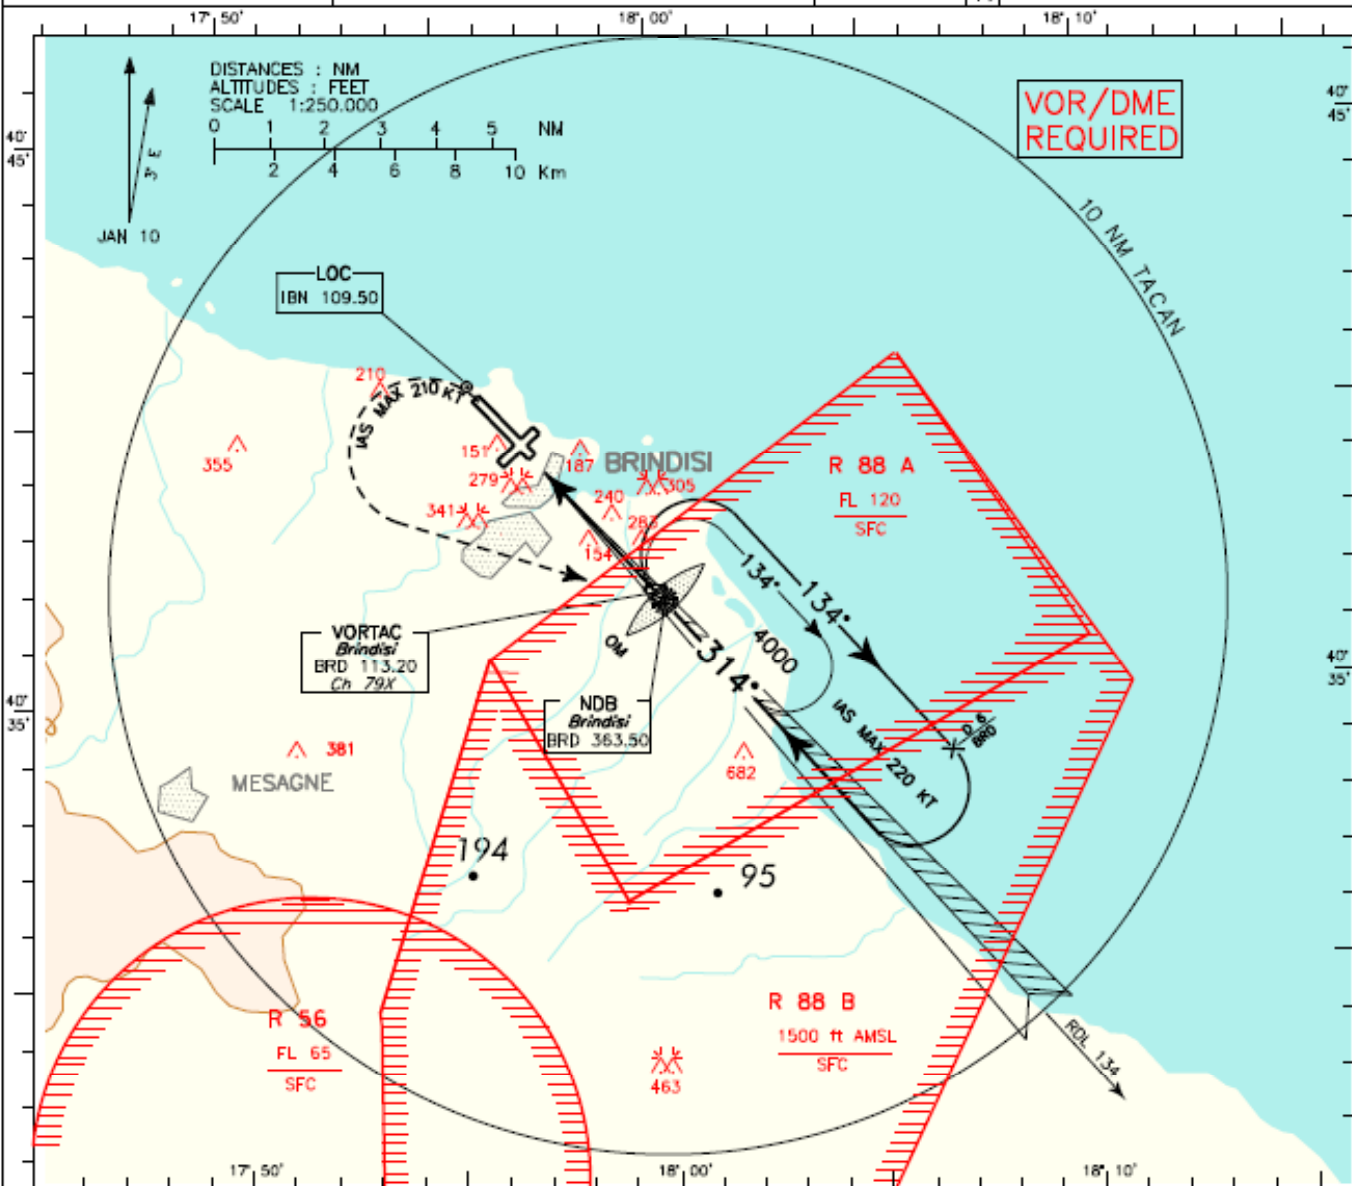


TRANSITION ALT 5000

MISSED APPROACH: Maintain TR 314° and climb to 3000 ft. Passing 650 ft turn left to BRD (IAS MAX 210 kt). If unable to reach BRD at 3000 ft, leave BRD on RDL 095 until passing 2600 ft then turn right to join BRD VORTAC holding pattern (MHA 3000 ft).

RDH 22.33 M

GP 2.5°

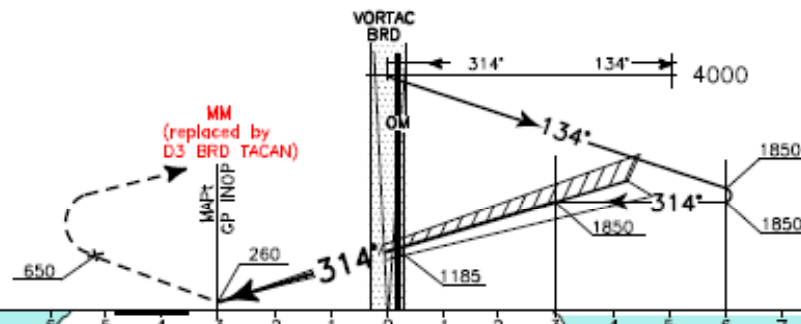

BRD TACAN

NM

THR ELEV 26

BRD TACAN

NM

*

OCA (OCH)	A	B	C	D
ILS	296 (270)	307 (281)	315 (289)	326 (300)
GP INOP	530 (510)			
CIRCLING (*)	640 (600)		740 (700)	

(*) REMARK:
Circling procedure allowed
North of RWY only.



GS	FT PER MIN	BRD TACAN	ALT (HGT)
90	398	3	1850(1830)
120	531	2	1590(1560)
150	664	1	1320(1290)
180	796	BRD	1050(1030)
210	929	1 FM	780 (760)
240	1062	2 FM	510 (490)
		3 FM	240 (220)

